


DLG-LED-043 T5



Application:

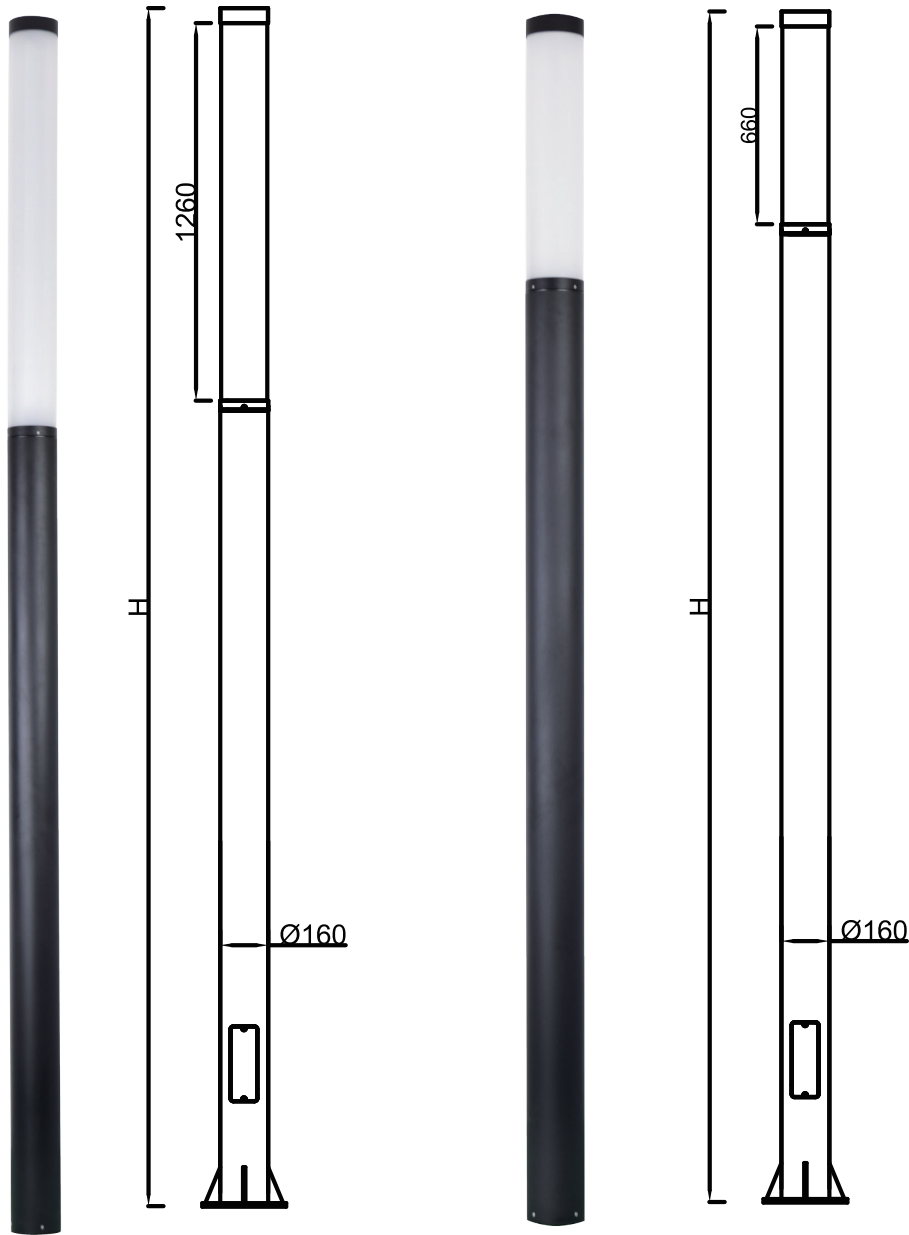

Walkways



Parks and Gardens



Car parks



Prestigious




Retail



Amenity

Distribution:

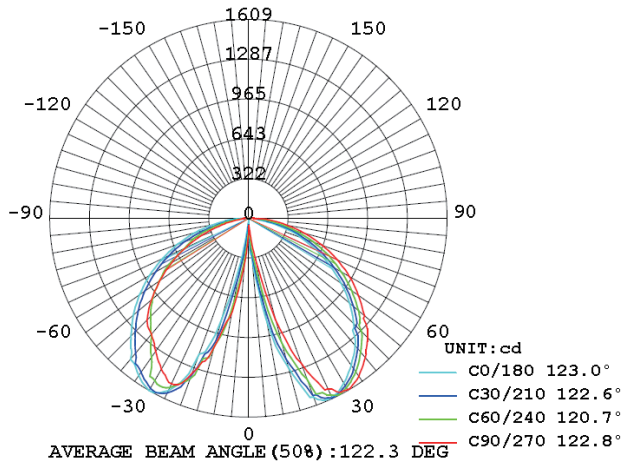

Features:

- Main body is made of Die-casting aluminum alloy with Extruded aluminum alloy.
- The diffuser is a opal anti-UV PMMA for high efficiency and vandal resistance.
- T5 tube light source.
- Easy access to tube via a removable head.
- 3000K/4000K/6500K color temperature options.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying, regular color: Black, Silver, RAL7043, RAL7016
- IP65 rating water and rust proof protection.
- IK08 rating housing protection.
- Warranty is 3 years.

Specification:

Item No.	Light source	Tube QTY	Wattage	CCT	CRI
DLG-LED-043-600	T5 tube	3-5PCS	21-35W	3000K/4000K/6500K	Ra≥80
DLG-LED-043-1200	T5 tube	3-5PCS	41-68W	3000K/4000K/6500K	Ra≥80